
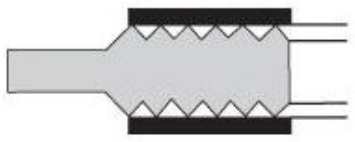
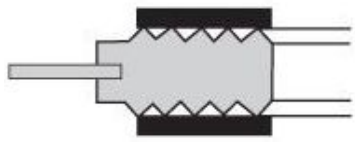


ANTILEAK 1040 Kammprofile Metal Gasket

Model Recommendation

Antileak Model No.	Cross Section View	Application
1040 L1		Apply to high-pressure pipe flanges, vessels and valves, etc...
1040 L2		Apply to high-pressure pipe flanges, vessels and valves, etc...
1040 L3		Apply to high-pressure pipe flanges, vessels and valves, etc...

Material Recommendation

Materials of Core and Outer Ring	Maximum operation temperature
Carbon Steel	600°C
Stainless Steel (SS304, SS316, etc...)	800°C
INC600,800, 625,825	1300°C
For other materials please contact the engineer.	

Materials of soft layer	Maximum operation temperature
Graphite	600°C
PTFE	260°C
Mica	1000°C
For other materials please contact the engineer.	

Available dimensions

Thickness	3-6mm
Metal core	2-5mm
Soft layer	0.5mm-2.0mm
Diameter	<3000mm
Design in compliance with ASME Standards and special designs.	